



TANO

C A B L E

河南泰诺电缆有限公司

HENAN TANO CABLE CO.,LTD.



600/1000V,XLPE INSULATED LEAD SHEATHED
to IEC 60502-1



TANO

C A L



Henan Tano Cable Co., Ltd.(Tano Cable for short), is a leading and professional manufacturer of cable and wire with more than 20 years' history and manufacturing experience, located in Zhengzhou city which is the capital of Henan province, China.

Tano Cable aims at providing integral power solution for international customers. We are working together as one company to provide products and technologies for building, maintaining and advancing the power and information infrastructures that connect the world. We mainly have the following products with strong competitiveness: All Aluminum Conductors (AAC), All Aluminum Alloy Conductors (AAAC), Aluminum Conductors Steel Reinforcement (ACSR) , Aerial Bundled Cables (ABC), building wire, welding cable, control cable, instrument cable, rubber cable, PVC insulated power cable, XLPE insulated power cable up to 500KV, customer-tailored cable and cable accessories, conforming to many different Country or international standard, such as IEC, HAR, BS, DIN, ICEA, ASTM, SABS, AS/NZS, JIS and so on.

Tano Cable pays great importance on the quality. We have strong teams and equipments for both production and inspection. Moreover, we have been awarded many certificates of ISO, CE, SONCAP, others from China and abroad. We keep improving our quality management system to meet the client's final satisfaction.

C A B L E

Tano Cable has provided services to the global clients who working in all areas of the energy, construction, industrial, specialty and communications market, and obtained the client's trust and compliment.

Welcome your any inquiry! Welcome your any visit! Welcome your any contact! We will take our biggest sincerity to be your long-term friend and partner.





600/1000V, XLPE Insulated and Lead Sheathed Cable to IEC 60502-1 Standard

APPLICATION

These cables are used for electricity supply in low voltage installation system, They are suitable for installation in indoors and outdoors, in cable ducts, underground, in power and switching stations, local energy distributions, industrial plants, where there is no risk of mechanical damage. The lead sheath brings an enhanced resistance to aromatic hydrocarbons.

STANDARD

IEC 60502-1

CONSTRUCTION



Conductors: The conductors shall be either of Class 1 or Class 2 of plain or metal-coated annealed copper or of plain aluminum or aluminum alloy, or of Class 5 of plain or metal-coated copper in accordance with IEC 60228.

Insulation: XLPE material and thickness shall be as per IEC 60502-1, rated for 90°C continuous operation.

Color Code

Color Code (1):

1 Core : Red or Black

2 Cores : Red, Black

3 Cores : Red, Yellow, Blue

4 Cores : Red, Yellow, Blue, Black

5 Cores : Red, Yellow, Blue, Black, Green

Above 5 Cores: Black Cores with White numerals

Color Code (2):

1 Core : Brown or Blue

2 Cores : Brown, Blue

3 Cores : Brown, Black, Grey

4 Cores : Blue, Brown, Black, Grey

5 Cores : Green/Yellow, Blue, Brown, Black, Grey

Above 5 Cores: Black Cores with White numerals

Other colors can be manufactured upon request

Assembly/ Inner Covering: The inner coverings may be extruded or lapped. For cables with circular cores, except cables with more than five cores, a lapped inner covering shall be permitted only if the interstices between the cores are substantially filled. A suitable binder is permitted before application of an extruded inner covering. The material is compatible with the insulating material, The materials used for inner coverings and fillers shall be suitable for the operating temperature of the cable and compatible with the insulating material. For halogen free cables, the inner covering and fillers shall also be halogen free compound.

Lead Sheath: Lead or lead alloy and shall be applied as a reasonably tight-fitting seamless tube.

Separation Sheath: The separation sheath shall be of extruded PVC Type ST2 as per IEC 60502-1, or other material refer to outer sheath material.


Armour: Aluminum/galvanized steel/steel wires applied helically over the Inner Covering as per IEC 60502-1, or double aluminum/steel tapes and copper/tinned copper wire can also be manufactured upon request.

Outer Sheath: Outer sheath shall be of extruded PVC Type ST1/ST2 as per IEC 60502-1, Polyethylene type ST3/ST7, Halogen free compound ST8, Polychloroprene, chlorosulfonated polyethylene or similar polymers,

type SE1 are also available on request.

CONSTRUCTION PARAMETER

Single core(unarmoured)

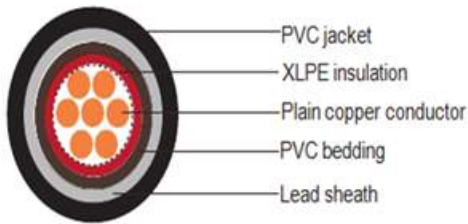

Nominal Cross Section	Diameter of Conductor (Approx.)	Nominal Insulation Thickness	Nominal Inner Covering Thickness	Nominal Lead Sheath Thickness	Nominal Sheath Thickness	Overall Diameter (Approx.)
mm ²	mm	mm	mm	mm	mm	mm
1x10	3.6	0.7	1	1.2	1.4	12.2
1x16	4.5	0.7	1	1.2	1.4	13.1
1x25	5.6	0.9	1	1.2	1.4	14.6
1x35	6.7	0.9	1	1.2	1.5	15.8
1x50	8	1	1	1.2	1.5	17.4
1x70	9.4	1.1	1	1.2	1.6	19.1
1x95	11	1.1	1	1.3	1.6	21
1x120	12.4	1.2	1	1.3	1.7	22.8
1x150	13.8	1.4	1	1.4	1.7	24.8
1x185	15.3	1.6	1	1.4	1.8	27
1x240	17.5	1.7	1	1.5	1.9	29.7
1x300	19.5	1.8	1	1.6	2	32.2
1x400	22.6	2	1.2	1.7	2.1	36.6
1x500	25.2	2.2	1.2	1.8	2.2	40
1x630	28.3	2.4	1.2	1.9	2.4	44

Two cores(unarmoured)



Nominal Cross Section	Diameter of Conductor (Approx.)	Nominal Insulation Thickness	Nominal Inner Covering Thickness	Nominal Lead Sheath Thickness	Nominal Sheath Thickness	Overall Diameter (Approx.)
mm ²	mm	mm	mm	mm	mm	mm
2x2.5	1.8	0.7	1	1.2	1.8	14.4
2x4	2.3	0.7	1	1.2	1.8	15.4
2x6	2.8	0.7	1	1.2	1.8	16.4
2x10	3.6	0.7	1	1.2	1.8	18
2x16	4.5	0.7	1	1.2	1.8	19.8
2x25	5.6	0.9	1	1.2	1.8	22.8
2x35	6.7	0.9	1	1.3	1.8	25.1
2x50	8	1	1	1.4	1.9	28.5
2x70	9.4	1.1	1	1.5	2	32.1
2x95	11	1.1	1.2	1.6	2.1	36.2
2x120	12.4	1.2	1.2	1.7	2.2	39.8
2x150	13.8	1.4	1.2	1.8	2.4	43.9
2x185	15.3	1.6	1.4	1.9	2.5	48.6
2x240	17.5	1.7	1.4	2	2.7	54.1
2x300	19.5	1.8	1.6	2.2	2.9	59.5

Three cores(unarmoured)



- Lead sheath
- XLPE insulation
- Plain copper conductor
- PVC bedding
- PVC jacket


TANO

C A B L E

Nominal Cross Section	Diameter of Conductor (Approx.)	Nominal Insulation Thickness	Nominal Inner Covering Thickness	Nominal Lead Sheath Thickness	Nominal Sheath Thickness	Overall Diameter (Approx.)
mm ²	mm	mm	mm	mm	mm	mm
3x1.5	1.4	0.7	1	1.2	1.8	14
3x2.5	1.8	0.7	1	1.2	1.8	14.9
3x4	2.3	0.7	1	1.2	1.8	16
3x6	2.8	0.7	1	1.2	1.8	17
3x10	3.6	0.7	1	1.2	1.8	18.8
3x16	4.5	0.7	1	1.2	1.8	20.7
3x25	5.6	0.9	1	1.2	1.8	24


3x35	6.7	0.9	1	1.3	1.8	26.5
3x50	8	1	1	1.4	1.9	30.2
3x70	9.4	1.1	1	1.5	2.1	34.1
3x95	11	1.1	1.2	1.6	2.2	38.5
3x120	12.4	1.2	1.2	1.7	2.3	42.4
3x150	13.8	1.4	1.4	1.9	2.5	47.2
3x185	15.3	1.6	1.4	2	2.6	51.9
3x240	17.5	1.7	1.4	2.1	2.8	57.7
3x300	19.5	1.8	1.6	2.3	3	63.6

Four cores(unarmoured)

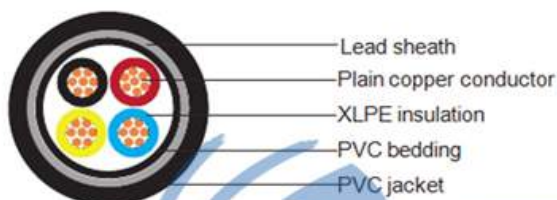

Nominal Cross Section	Diameter of Conductor (Approx.)	Nominal Insulation Thickness	Nominal Inner Covering Thickness	Nominal Lead Sheath Thickness	Nominal Sheath Thickness	Overall Diameter (Approx.)
mm ²	mm	mm	mm	mm	mm	mm
4x1.5	1.4	0.7	1	1.2	1.8	15.2
4x2.5	1.8	0.7	1	1.2	1.8	16.2
4x4	2.3	0.7	1	1.2	1.8	18.4
4x6	2.8	0.7	1	1.2	1.8	19.6
4x10	3.6	0.7	1	1.2	1.8	21.5
4x16	4.5	0.7	1	1.2	1.8	23.8
4x25	5.6	0.9	1	1.3	1.8	27.7
4x35	6.7	0.9	1	1.4	1.9	30.7
4x50	8	1	1	1.5	2.1	35.8
4x70	9.4	1.1	1.2	1.6	2.2	39.6
4x95	11	1.1	1.2	1.7	2.4	45.1
4x120	12.4	1.2	1.4	1.9	2.6	49.4
4x150	13.8	1.4	1.4	2	2.7	54.3
4x185	15.3	1.6	1.4	2.1	2.9	60
4x240	17.5	1.7	1.6	2.3	3.1	67.1
4x300	19.5	1.8	1.6	2.5	3.3	73.7

Single core(aluminum wire armoured)

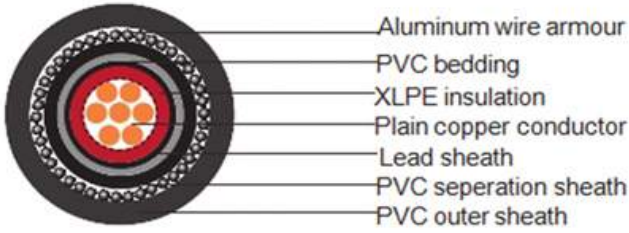

Nominal Cross Section	Diameter of Conductor (Approx.)	Nominal Insulation Thickness	Nominal Inner Covering Thickness	Nominal Lead Sheath Thickness	Nominal Separation Thickness	Nominal dia. of Aluminium wire armour	Nominal Sheath Thickness	Overall Diameter (Approx.)
mm ²	mm	mm	mm	mm	mm	mm	mm	mm
1x35	7.4	1.2	1	1.2	1	1.25	1.8	16.6
1x50	8.8	1.4	1	1.2	1	1.6	1.8	18.8
1x70	10.6	1.4	1	1.2	1	1.6	1.8	20.4
1x95	12.4	1.6	1	1.3	1	1.6	1.8	22
1x120	14	1.6	1	1.3	1	1.6	1.8	23.6
1x150	15.5	1.8	1	1.4	1	1.6	1.8	25.4
1x185	17.4	2	1	1.4	1.1	2	1.9	28.2
1x240	20.3	2.2	1	1.5	1.1	2	1.9	30.8
1x300	22.7	2.4	1	1.6	1.2	2	2	33.1
1x400	25.4	2.6	1.2	1.7	1.2	2	2.2	37.3
1x500	28.8	2.8	1.2	1.8	1.3	2.5	2.3	41.6
1x630	30.4	2.8	1.2	1.9	1.4	2.5	2.4	45.3

Two cores(Galvanized steel wire armoured)



Nominal Cross Section	Diameter of Conductor (Approx.)	Nominal Insulation Thickness	Nominal Inner Covering Thickness	Nominal Lead Sheath Thickness	Nominal Separation Thickness	Nominal dia. of Steel wire armour	Nominal Sheath Thickness	Overall Diameter (Approx.)
mm ²	mm	mm	mm	mm	mm	mm	mm	mm

2x2.5	1.8	0.7	1	1.2	1	1.25	1.8	14.5
2x4	2.3	0.7	1	1.2	1	1.25	1.8	15.5
2x6	2.8	0.7	1	1.2	1	1.25	1.8	16.5
2x10	3.6	0.7	1	1.2	1	1.6	1.8	18.8
2x16	4.5	0.7	1	1.2	1	1.6	1.8	20.6
2x25	5.6	0.9	1	1.2	1	1.6	1.8	23.6
2x35	6.7	0.9	1	1.3	1	1.6	1.8	25.8
2x50	8	1	1	1.4	1.1	2	1.9	29.8
2x70	9.4	1.1	1	1.5	1.2	2	2	33.2
2x95	11	1.1	1.2	1.6	1.2	2	2.1	37.1
2x120	12.4	1.2	1.2	1.7	1.3	2.5	2.3	41.6
2x150	13.8	1.4	1.2	1.8	1.4	2.5	2.4	45.4
2x185	15.3	1.6	1.4	1.9	1.5	2.5	2.6	49.9
2x240	17.5	1.7	1.4	2	1.6	2.5	2.7	55.1
2x300	19.5	1.8	1.6	2.2	1.7	2.5	2.9	60.2

Three cores(Galvanized steel wire armoured)



Galvanized steel wire armour
 XLPE insulation
 Plain copper conductor
 PVC bedding
 Lead sheath
 PVC separation sheath
 PVC outer sheath

B L E

Nominal Cross Section	Diameter of Conductor (Approx.)	Nominal Insulation Thickness	Nominal Inner Covering Thickness	Nominal Lead Sheath Thickness	Nominal Separation Thickness	Nominal Dia. of Steel wire armour	Nominal Sheath Thickness	Overall Diameter (Approx.)
mm ²	mm	mm	mm	mm	mm	mm	mm	mm
3x1.5	1.4	0.7	1	1.2	1	1.25	1.8	14.1
3x2.5	1.8	0.7	1	1.2	1	1.25	1.8	15
3x4	2.3	0.7	1	1.2	1	1.25	1.8	16.1
3x6	2.8	0.7	1	1.2	1	1.6	1.8	17.8
3x10	3.6	0.7	1	1.2	1	1.6	1.8	19.6
3x16	4.5	0.7	1	1.2	1	1.6	1.8	21.5
3x25	5.6	0.9	1	1.2	1	1.6	1.8	24.7
3x35	6.7	0.9	1	1.3	1.1	1.6	1.8	27.2
3x50	8	1	1	1.4	1.1	2	2	31.5
3x70	9.4	1.1	1	1.5	1.2	2	2.1	35.2
3x95	11	1.1	1.2	1.6	1.3	2.5	2.3	40.3
3x120	12.4	1.2	1.2	1.7	1.4	2.5	2.4	44

3x150	13.8	1.4	1.4	1.9	1.4	2.5	2.5	48.6
3x185	15.3	1.6	1.4	2	1.5	2.5	2.7	53
3x240	17.5	1.7	1.4	2.1	1.6	2.5	2.8	58.5
3x300	19.5	1.8	1.6	2.3	1.8	3.15	3.1	65.4

Four cores(Galvanized steel wire armoured)



- Galvanized steel wire armour
- PVC bedding
- Plain copper conductor
- XLPE insulation
- Lead sheath
- PVC separation sheath
- PVC outer sheath

Nominal Cross Section	Diameter of Conductor (Approx.)	Nominal Insulation Thickness	Nominal Inner Covering Thickness	Nominal Lead Sheath Thickness	Nominal Separation Thickness	Nominal dia. of Steel wire armour	Nominal Sheath Thickness	Overall Diameter (Approx.)
mm ²	mm	mm	mm	mm	mm	mm	mm	mm
4x1.5	1.4	0.7	1	1.2	1	1.25	1.8	14.9
4x2.5	1.8	0.7	1	1.2	1	1.25	1.8	15.8
4x4	2.3	0.7	1	1.2	1	1.6	1.8	17.7
4x6	2.8	0.7	1	1.2	1	1.6	1.8	18.9
4x10	3.6	0.7	1	1.2	1	1.6	1.8	20.9
4x16	4.5	0.7	1	1.2	1	1.6	1.8	23
4x25	5.6	0.9	1	1.3	1	1.6	1.8	26.7
4x35	6.7	0.9	1	1.4	1.1	2	1.9	30.4
4x50	8	1	1	1.5	1.2	2	2.1	34.2
4x70	9.4	1.1	1.2	1.6	1.3	2.5	2.2	39.9
4x95	11	1.1	1.2	1.7	1.4	2.5	2.4	44
4x120	12.4	1.2	1.4	1.9	1.4	2.5	2.5	48.6
4x150	13.8	1.4	1.4	2	1.5	2.5	2.7	53.2
4x185	15.3	1.6	1.4	2.1	1.6	2.5	2.8	58.1
4x240	17.5	1.7	1.6	2.3	1.8	3.15	3.1	66.1
4x300	19.5	1.8	1.6	2.5	1.9	3.15	3.3	71.8



河南泰诺电缆有限公司
HENAN TANO CABLE CO.,LTD.

Website: <http://www.tanocable.com/>

Tel.: 0086-371-60306197

Fax: 0086-371-60306197

Email: info@tanocable.com

Address: Zhengzhou City, Henan
Province, China.

Zip: 450000